


Pedestal Sink


Installation Instructions

For Models 561-6923 & 561-6924, 561-6925 & 561-6924, 572-6286 & 572-6287



Tools :

- A . Adjustable Wrench
- B . Level
- C . Drill
- D . Hacksaw
- E . Jig Saw
- F . Measuring Tape
- G . Pencil
- H . Putty Knife
- I . Screw Driver
- J . Silicone Adhesive
- K . Wrench

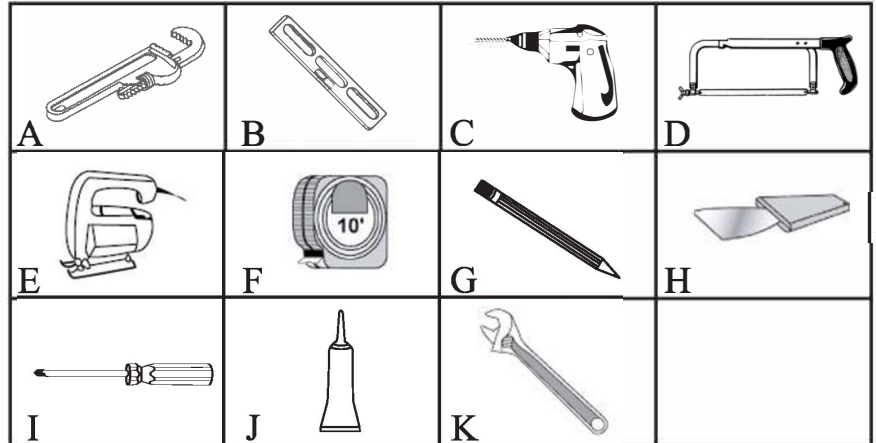

Preparation :

1. Install the water supplies and drain piping. Install the supply stops so the handles will not touch the pedestal when fully open.
2. Install sufficient backing behind the finished wall to provide secure material for the anchoring devices.
3. Place the pedestal in the approximate location.
4. Carefully lift the lavatory into place on the pedestal, and slowly move the pedestal as required to ensure proper fit.


NOTE: The lavatory must be supported by the pedestal.

1. Hold the brackets in place under the lavatory, and mark the bracket hole locations on the finished wall.
2. Carefully remove the lavatory from the pedestal and set aside. Move the pedestal from the area.

Install the Lavatory :

IMPORTANT! To mount the bracket to the wall, use fasteners appropriate for your wall type.

1. Mount the brackets to the wall at the marked locations.
2. Install the faucet and drain to the lavatory according to the manufacturer's instructions.
3. Position the pedestal on the floor.
4. Carefully set the lavatory on the brackets, making sure the lavatory is supported by the pedestal.
5. Position the lavatory as desired.
6. Connect and tighten the trap to the drain. Complete the water supply connections to the faucet according to the faucet manufacturer's instructions.
7. Run water into the lavatory and check all connections for leaks.
8. Optional: Apply silicone sealant around the pedestal foot to stabilize.

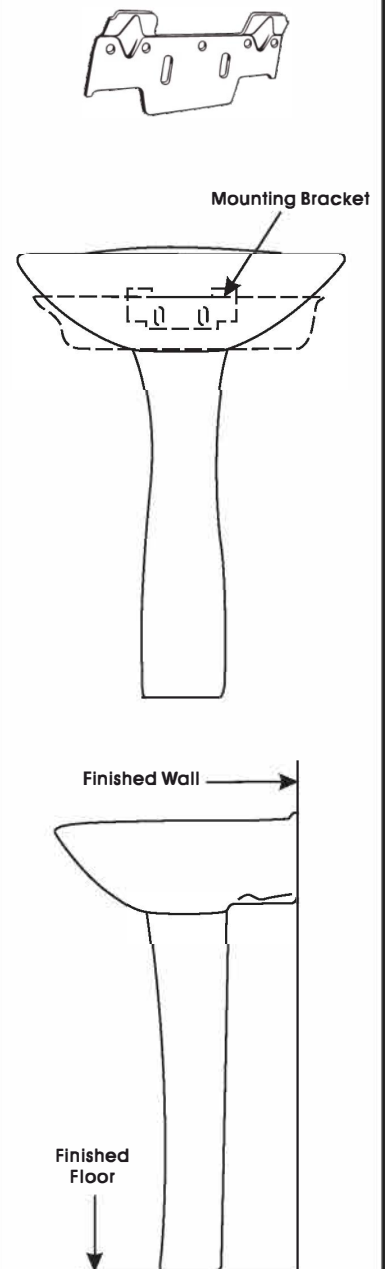



LIMITED WARRANTY

Vitreous China

Compass Manufacturing International Vitreous China is warranted to the original consumer purchaser to be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the toilet was first installed or for 5 years from the date of purchase.

Mechanical Parts

Mechanical parts of the Compass Manufacturing International toilet are warranted to the original consumer purchaser to be free from defects in material and workmanship for 1 year from the date of purchase.

Compass Manufacturing International will replace, free of charge, during the applicable warranty period, any part or finish that proves defective in material and/or workmanship under normal installation, use and service. Compass Manufacturing International recommends using a professional plumber for all installation and repair. Replacement parts may be obtained by emailing the address below, calling the number below or by writing to:

Compass Manufacturing International
6702 Enterprise Drive
Louisville, KY 40214
800.626.3525
www.cmiproduct.com
warranty@cmiproduct.com

Vitreous China Product Care

Rinse thoroughly and use a soft cloth to wipe the product dry after each use.

Regular Maintenance:

Remove stains using a cleaning product that contains mild abrasives; rinse and towel dry. Strong abrasive cleaners will scratch and dull the surface. Use toilet bowl cleaners on the inside of the bowl only. Do not use in-tank toilet cleaners as they can damage the flush valve or other working parts. Wipe any splashes of cleaner solutions from plastic or plated surfaces immediately.

Products to Consider

Comet Bathroom Cleanser
Formula 409 Antibacterial All Purpose

Windex Original
Soft Scrub Original